


HIK-7608NI-SE/P (DS-7608NI-SE/P)

Embedded Plug&Play NVR



DS-7608NI-SE/P

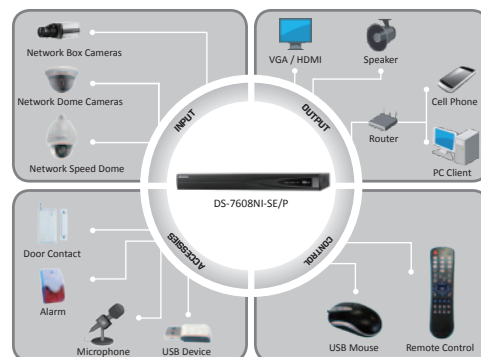

Key features

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- HDD quota and group management
- 4 independent PoE network interfaces are provided

Rear Panel of DS-7608NI-SE/P



1. LAN Network Interface
2. RS-485 Interface
3. 100~240VAC Power Input
4. Power Switch
5. USB Interface
6. GND
7. HDMI Interface
8. VGA Output
9. Audio In
10. Audio Out
11. Network Interfaces with PoE function

| DS-7608NI-SE/P | |
|---------------------------|--|
| Video/Audio input | |
| IP video input | 4-ch |
| Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1kΩ) |
| Incoming bandwidth | 40Mbps |
| Video/Audio output | |
| Decoding resolution | 5MP / 3MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF |
| HDMI / VGA output | 1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz |
| CVBS | 1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC) (optional) |
| Audio output | 1-ch, RCA (Linear, 1kΩ) |
| Playback resolution | 5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF |
| Synchronous playback | 4-ch 720P/ 2-ch 1080P / 1-ch 5MP |
| Hard disk | |
| SATA | 2 SATA interfaces |
| Capacity | Up to 3TB for each disk |
| External interface | |
| Network interface | 1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface 4 independent 10 / 100 Mbps PoE Ethernet interfaces |
| Serial interface | 1 RS-485 half-duplex interface |
| USB interface | 2 × USB 2.0 |
| Alarm in / out | 4 / 1 (optional) |
| General | |
| Power supply | 100 ~ 240 VAC, 47 ~ 63 Hz, 3A |
| Consumption | ≤ 15 W (without hard disk) |
| Working temperature | -10 °C ~ +55 °C |
| Working humidity | 10% ~ 90% |
| Chassis | 19-inch rack-mounted 1U chassis |
| Dimensions (W × D × H) | 445 × 290 × 45mm |
| Weight | ≤ 2 Kg (without hard disk) |